

VD2 17 bit Absolute Single Magnetic Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
60	WD60M-02030S-A1F-L	VD2-010SA1G	0.64	3000	220V
		VD2-010SA1H	0.64	3000	220V
60	WD60M-04030S-A1F	VD2-010SA1G	1.27	3000	220V
		VD2-010SA1H	1.27	3000	220V
60	WD60M-04030S-A1F-L	VD2-010SA1G	1.27	3000	220V
		VD2-010SA1H	1.27	3000	220V
80	WD80M-07530S-A1F	VD2-014SA1G	2.39	3000	220V
		VD2-014SA1H	2.39	3000	220V
80	WD80M-07530S-A1F-L	VD2-014SA1G	2.39	3000	220V
		VD2-014SA1H	2.39	3000	220V






VD2 17 bit Absolute Multi Magnetic Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
60	WD60M-02030S-C1F-L	VD2-010SA1G	0.64	3000	220V
		VD2-010SA1H	0.64	3000	220V
60	WD60M-04030S-C1F	VD2-010SA1G	1.27	3000	220V
		VD2-010SA1H	1.27	3000	220V
60	WD60M-04030S-C1F-L	VD2-010SA1G	1.27	3000	220V
		VD2-010SA1H	1.27	3000	220V
80	WD80M-07530S-C1F	VD2-014SA1G	2.39	3000	220V
		VD2-014SA1H	2.39	3000	220V
80	WD80M-07530S-C1F-L	VD2-014SA1G	2.39	3000	220V
		VD2-014SA1H	2.39	3000	220V

VD2 23 bit Absolute Multi Optical Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
60	WD60M-02030S-D2F-L	VD2-010SA1G	0.64	3000	220V
		VD2-010SA1H	0.64	3000	220V
60	WD60M-04030S-D2F	VD2-010SA1G	1.27	3000	220V
		VD2-010SA1H	1.27	3000	220V
60	WD60M-04030S-D2F-L	VD2-010SA1G	1.27	3000	220V
		VD2-010SA1H	1.27	3000	220V
80	WD80M-07530S-D2F	VD2-014SA1G	2.39	3000	220V
		VD2-014SA1H	2.39	3000	220V
80	WD80M-07530S-D2F-L	VD2-014SA1G	2.39	3000	220V
		VD2-014SA1H	2.39	3000	220V



SPECIFICATION

Item			VD2 Series
Basic Specifications	Voltage		220V
	Control Method		IGBT PWM controlled sine wave current drive
	Encoder		2500ppr incremental encoder; 17 bit, 23 bit absolute encoder
	Input Signal		8*DI
	Output Signal		4*DO
	Analog Signal Input		2*AI input(-10v~10v)
	Pulse Signal Input		Open collector or differential input
	Pulse Feedback Output		A,B,Z differential output
	Internal Instructions		Support 8 internal speed commands and internal multi-segment position commands
	Communication/Debug		Support to communicate with modbus device and debug with SCTools at the same time. (SCTools can set&monitor servo parameters,monitor waveform,self-tuning parameter,etc.)
	Braking Resistor		400W without built-in baking resistor; both support external braking resistor
Function Setting	General Function	Self-tuning	SCTools supports self-turning function,and identifies load inertia identification and rigidity level, and other parameters.
		Waveform Monitoring	View position, speed, torque and other curves on PC in real time
		Waveform Storage	The original waveform data could be stored for up to 10s
		Parameter Import / Export	Support batch parameter import and export; support PLC configurate servo parameters automatically (supported by some models)
		Vibration Suppression	Suppress mechanical vibration by setting vibration suppression parameters
		Protective Function	Overvoltage, undervoltage, overcurrent, overspeed, overload, overheating, encoder failure, excessive position deviation, torque limit, speed limit, etc
		Brake	Support
		Universal Control DI	Servo enable (SON), fault and warning clear (A-CLR), forward drive prohibition (POT), reverse drive prohibition (NOT), command reverse (C-SIGN), emergency stop (E-STOP), Gain switching (GAIN-SEL), Multi-speed command selection(INSPD1、 INSPD2、 INSPD3) ; Internal multi-position command selection and enable (POS1,POS2, POS3,POS4, POSEN)
		Universal Control DO	Servo ready (RDY), fault signal (ALM), warning signal (WARN), rotation detection (TGON), zero speed signal (ZSP), torque limit (T-LIMIT), speed limit (V-LIMIT),servo on state output (SRV-ST), servo brake output (BRK-OFF)
	Pulse Input	Pulse Frequency	Maximum 500khz
		Pulse Type	Pulse + Direction, CCW/CW pulse, Quadraturel encoding
		Pulse Filtering	First-order low-pass filter or smooth filter
		Pulse Output	Differential Quadraturel encoding A, B, Z output; PPR is settable by p0-16 or P0-17~P0-20.
	Speed Mode	Command Input	-10V~+10V analog input internal speed command (Maximum 8)
		Zero Clamp	Motor speed could be clamped to zero via the setting of zero clamp function
		Torque Limit	Support to set the torque limit
	Torque Mode	Command Input	-10V~+10V analog input and Internal torque command
		Torque Reaching	Torque reaching threshold and DO can be set flexibly
		Speed Limit	The speed limit can be set flexibly

60 Series Motor Specification


Motor model	WD60M-02030S  	WD60M-04030S  
Rated power (kW)	0.2	0.4
Rated torque (N·m)	0.64	1.27
Rated speed (r/min)	3000	3000
Brake	Optional	Optional
LA without Brake (mm)	75	92
LA with Brake (mm)	104.5	121.5

Remark:

★: A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

-L: Connector type

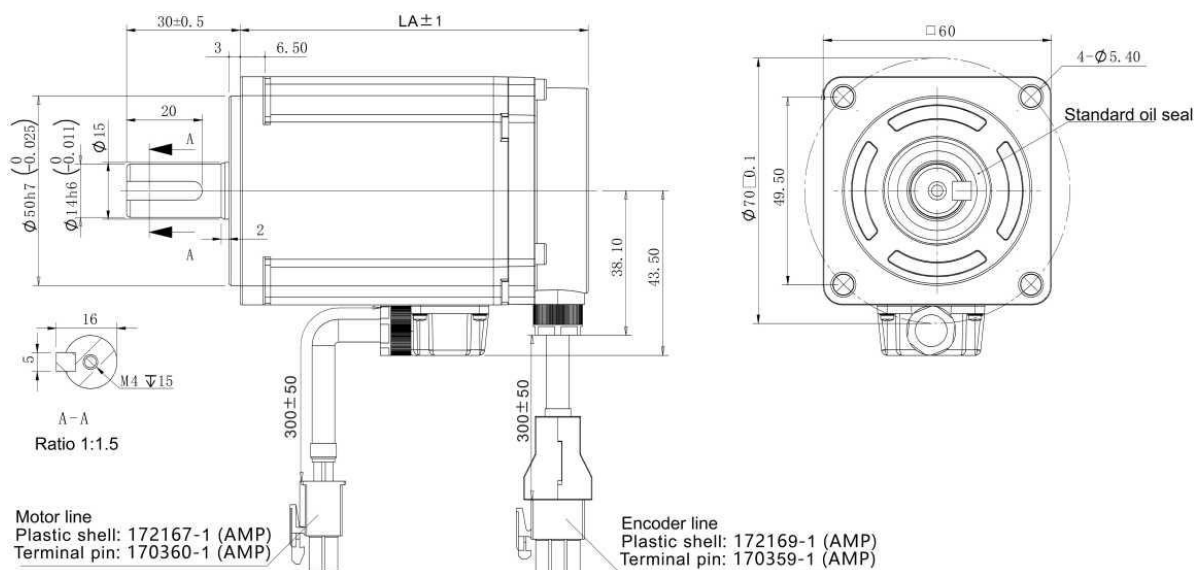

80 Series Motor Specification


Motor model	WD80M-07530S-A1F	WD80M-07530S-C1F	WD80M-07530S-D2F
Rated power (kW)		0.75	
Rated torque (N·m)		2.39	
Rated speed (r/min)		3000	
Brake		Optional	
LA without Brake (mm)		98.5	
LA with Brake (mm)		132.5	

Remark:

A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

F-sealed; G-sealed & Brake

-L: Connector type

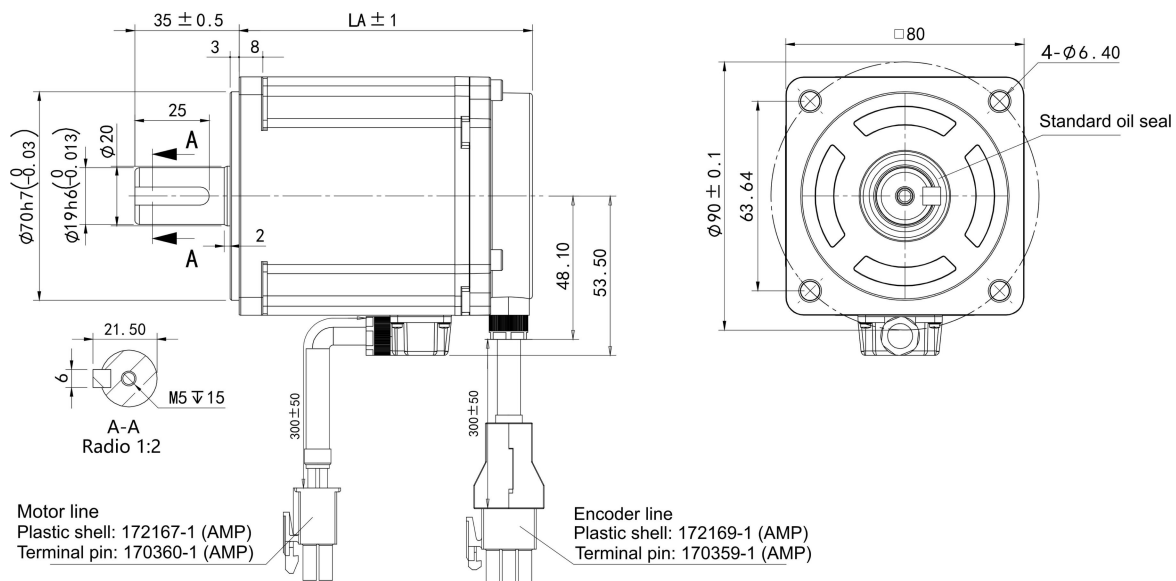

VD2 17 bit Absolute Single Magnetic Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
80	WD80M-10030S-A1F	VD2-014SA1G	3.18	3000	220V
		VD2-014SA1H	3.18	3000	220V
80	WD80M-10030S-A1G	VD2-014SA1G	3.18	3000	220V
		VD2-014SA1H	3.18	3000	220V
80	WE80M-11030S-A1F	VD2-016SA1G	3.5	3000	220V
		VD2-016SA1H	3.5	3000	220V
80	WE80M-10025S-A1F	VD2-016SA1G	4	2500	220V
		VD2-016SA1H	4	2500	220V
80	WE80M-12030S-A1F	VD2-016SA1G	4	3000	220V
		VD2-016SA1H	4	3000	220V
110	WE110M-12030S-A1F	VD2-016SA1G	4	3000	220V
		VD2-016SA1H	4	3000	220V
110	WE110M-15030S-A1F	VD2-019SA1G	5	3000	220V
		VD2-019SA1H	5	3000	220V
110	WE110M-18030S-A1F	VD2-019SA1G	6	3000	220V
		VD2-019SA1H	6	3000	220V
130	WE130M-10025S-A1F	VD2-016SA1G	4	2500	220V
		VD2-016SA1H	4	2500	220V
130	WE130M-13025S-A1F	VD2-016SA1G	5	2500	220V
		VD2-016SA1H	5	2500	220V
130	WE130M-15025S-A1F	VD2-019SA1G	6	2500	220V
		VD2-019SA1H	6	2500	220V
130	WE130M-20025S-A1F	VD2-021SA1G	7.7	2500	220V
		VD2-021SA1H	7.7	2500	220V
130	WE130M-15015S-A1F	VD2-016SA1G	10	1500	220V
		VD2-016SA1H	10	1500	220V
130	WE130M-26025S-A1F	VD2-021SA1G	10	2500	220V
		VD2-021SA1H	10	2500	220V
130	WE130M-23015S-A1F	VD2-019SA1G	15	1500	220V
		VD2-019SA1H	15	1500	220V
130	WE130M-38025S-A1F	VD2-021SA1G	15	2500	220V
		VD2-021SA1H	15	2500	220V
130	WE130M-20025T-A1F	VD2-021TA1G	7.7	2500	380V
130	WE130M-26025T-A1F	VD2-021TA1G	10	2500	380V
130	WE130M-38025T-A1F	VD2-021TA1G	15	2500	380V
130	WE130M-42020T-A1F	VD2-021TA1G	20	2000	380V
130	WE130M-53030T-A1F	VD2-021TA1G	17	3000	380V




VD2 17 bit Absolute Multi Magnetic Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
80	WD80M-10030S-C1F	VD2-014SA1G	3.18	3000	220V
		VD2-014SA1H	3.18	3000	220V
80	WD80M-10030S-C1G	VD2-014SA1G	3.18	3000	220V
		VD2-014SA1H	3.18	3000	220V
80	WE80M-11030S-C1F	VD2-016SA1G	3.5	3000	220V
		VD2-016SA1H	3.5	3000	220V
80	WE80M-12030S-C1F	VD2-016SA1G	4	3000	220V
		VD2-016SA1H	4	3000	220V
110	WE110M-12030S-C1F	VD2-016SA1G	4	3000	220V
		VD2-016SA1H	4	3000	220V
110	WE110M-15030S-C1F	VD2-019SA1G	5	3000	220V
		VD2-019SA1H	5	3000	220V
110	WE110M-18030S-C1F	VD2-019SA1G	6	3000	220V
		VD2-019SA1H	6	3000	220V
130	WE130M-10025S-C1F	VD2-016SA1G	4	2500	220V
		VD2-016SA1H	4	2500	220V
130	WE130M-13025S-C1F	VD2-016SA1G	5	2500	220V
		VD2-016SA1H	5	2500	220V
130	WE130M-15025S-C1F	VD2-019SA1G	6	2500	220V
		VD2-019SA1H	6	2500	220V
130	WE130M-20025S-C1F	VD2-021SA1G	7.7	2500	220V
		VD2-021SA1H	7.7	2500	220V
130	WE130M-15015S-C1F	VD2-016SA1G	10	1500	220V
		VD2-016SA1H	10	1500	220V

130	WE130M-26025S-C1F	VD2-021SA1G	10	2500	220V
		VD2-021SA1H	10	2500	220V
130	WE130M-23015S-C1F	VD2-019SA1G	15	1500	220V
		VD2-019SA1H	15	1500	220V
130	WE130M-38025S-C1F	VD2-021SA1G	15	2500	220V
		VD2-021SA1H	15	2500	220V
130	WE130M-26025S-C1F	VD2-021SA1G	10	2500	220V
		VD2-021SA1H	10	2500	220V
130	WE130M-38025S-C1F	VD2-021SA1G	15	2500	220V
		VD2-021SA1H	15	2500	220V
130	WE130M-20025T-C1F	VD2-021TA1G	7.7	2500	380V
130	WE130M-26025T-C1F	VD2-021TA1G	10	2500	380V
130	WE130M-38025T-C1F	VD2-021TA1G	15	2500	380V
130	WE130M-53030T-C1F	VD2-021TA1G	17	3000	380V

VD2 23 bit Absolute Multi Optical Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
80	WD80M-10030S-D2F	VD2-014SA1G	3.18	3000	220V
		VD2-014SA1H	3.18	3000	220V
80	WD80M-10030S-D2G	VD2-014SA1G	3.18	3000	220V
		VD2-014SA1H	3.18	3000	220V
80	WE80M-11030S-D2F	VD2-016SA1G	3.5	3000	220V
		VD2-016SA1H	3.5	3000	220V
80	WE80M-12030S-D2F	VD2-016SA1G	4	3000	220V
		VD2-016SA1H	4	3000	220V
110	WE110M-12030S-D2F	VD2-016SA1G	4	3000	220V
		VD2-016SA1H	4	3000	220V
110	WE110M-15030S-D2F	VD2-019SA1G	5	3000	220V
		VD2-019SA1H	5	3000	220V
110	WE110M-18030S-D2F	VD2-019SA1G	6	3000	220V
		VD2-019SA1H	6	3000	220V
130	WE130M-10025S-D2F	VD2-016SA1G	4	2500	220V
		VD2-016SA1H	4	2500	220V
130	WE130M-13025S-D2F	VD2-016SA1G	5	2500	220V
		VD2-016SA1H	5	2500	220V
130	WE130M-15025S-D2F	VD2-019SA1G	6	2500	220V
		VD2-019SA1H	6	2500	220V
130	WE130M-20025S-D2F	VD2-021SA1G	7.7	2500	220V
		VD2-021SA1H	7.7	2500	220V
130	WE130M-15015S-D2F	VD2-016SA1G	10	1500	220V
		VD2-016SA1H	10	1500	220V
130	WE130M-26025S-D2F	VD2-021SA1G	10	2500	220V
		VD2-021SA1H	10	2500	220V
130	WE130M-23015S-D2F	VD2-019SA1G	15	1500	220V
		VD2-019SA1H	15	1500	220V
130	WE130M-38025S-D2F	VD2-021SA1G	15	2500	220V
		VD2-021SA1H	15	2500	220V
130	WE130M-26025S-D2F	VD2-021SA1G	10	2500	220V
		VD2-021SA1H	10	2500	220V
130	WE130M-38025S-D2F	VD2-021SA1G	15	2500	220V
		VD2-021SA1H	15	2500	220V
130	WE130M-20025T-D2F	VD2-021TA1G	7.7	2500	380V
130	WE130M-26025T-D2F	VD2-021TA1G	10	2500	380V
130	WE130M-38025T-D2F	VD2-021TA1G	15	2500	380V
130	WE130M-53030T-D2F	VD2-021TA1G	17	3000	380V
180	WE180M-30015T-D2F	VD2-021TA1G	19	1500	380V
180	WE180M-43015T-D2F	VD2-021TA1G	27	1500	380V
180	WE180M-55015T-D2F	VD2-021TA1G	35	1500	380V

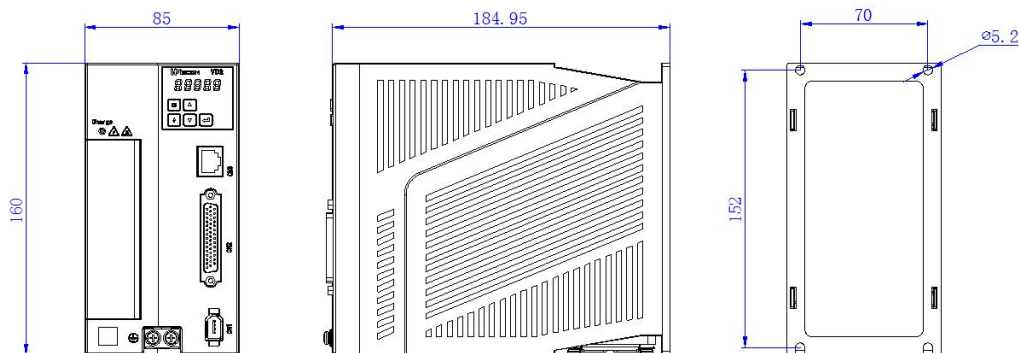

SPECIFICATION

Item			VD2 Series
Basic Specifications	Voltage		220V / 380V
	Control Method		IGBT PWM controlled sine wave current drive
	Encoder		2500ppr incremental encoder; 17 bit, 23 bit absolute encoder
	Input Signal		8*DI
	Output Signal		4*DO
	Analog Signal Input		2*AI input(-10v~10v)
	Pulse Signal Input		Open collector or differential input
	Pulse Feedback Output		A,B,Z differential output
	Internal Instructions		Support 8 internal speed commands and internal multi-segment position commands
	Communication/Debug		Support to communicate with modbus device and debug with SCTools at the same time. (SCTools can set&monitor servo parameters,monitor waveform,self-tuning parameter,etc.)
	Braking Resistor		400W without built-in baking resistor; both support external braking resistor
Function Setting	General Function	Self-tuning	SCTools supports self-turning function,and identifies load inertia identification and rigidity level, and other parameters.
		Waveform Monitoring	View position, speed, torque and other curves on PC in real time
		Waveform Storage	The original waveform data could be stored for up to 10s
		Parameter Import / Export	Support batch parameter import and export; support PLC configurate servo parameters automatically (supported by some models)
		Vibration Suppression	Suppress mechanical vibration by setting vibration suppression parameters
		Protective Function	Overvoltage, undervoltage, overcurrent, overspeed, overload, overheating, encoder failure, excessive position deviation, torque limit, speed limit, etc
		Brake	Support
		Universal Control DI	Servo enable (SON), fault and warning clear (A-CLR), forward drive prohibition (POT), reverse drive prohibition (NOT), command reverse (C-SIGN), emergency stop (E-STOP), Gain switching (GAIN-SEL), Multi-speed command selection(INSPD1、 INSPD2、 INSPD3) ; Internal multi-position command selection and enable (POS1,POS2, POS3,POS4, POSEN)
		Universal Control DO	Servo ready (RDY), fault signal (ALM), warning signal (WARN), rotation detection (TGON), zero speed signal (ZSP), torque limit (T-LIMIT), speed limit (V-LIMIT),servo on state output (SRV-ST), servo brake output (BRK-OFF)
	Pulse Input	Pulse Frequency	Maximum 500khz
		Pulse Type	Pulse + Direction, CCW/CW pulse, Quadraturel encoding
		Pulse Filtering	First-order low-pass filter or smooth filter
		Pulse Output	Differential Quadraturel encoding A, B, Z output; PPR is setttable by p0-16 or P0-17~P0-20.
	Speed Mode	Command Input	-10V~+10V analog input internal speed command (Maximum 8)
		Zero Clamp	Motor speed could be clamped to zero via the setting of zero clamp function
		Torque Limit	Support to set the torque limit
	Torque Mode	Command Input	-10V~+10V analog input and Internal torque command
		Torque Reaching	Torque reaching threshold and DO can be set flexibly
		Speed Limit	The speed limit can be set flexibly

80 Series Motor Specification


Motor model	WD80M-10030S  	WD80M-11030S  	WD80M-10025S  	WD80M-12030S  
Rated power (kW)	1	1.1	1	1.2
Rated torque (N·m)	3.18	3.5	4	4
Rated speed (r/min)	3000	3000	2500	3000
Brake	Optional	Optional	Optional	Optional
LA without Brake (mm)	98.5	179	191	191
LA with Brake (mm)	132.5	221	233	233

Remark:

★: A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

-L: Connector type

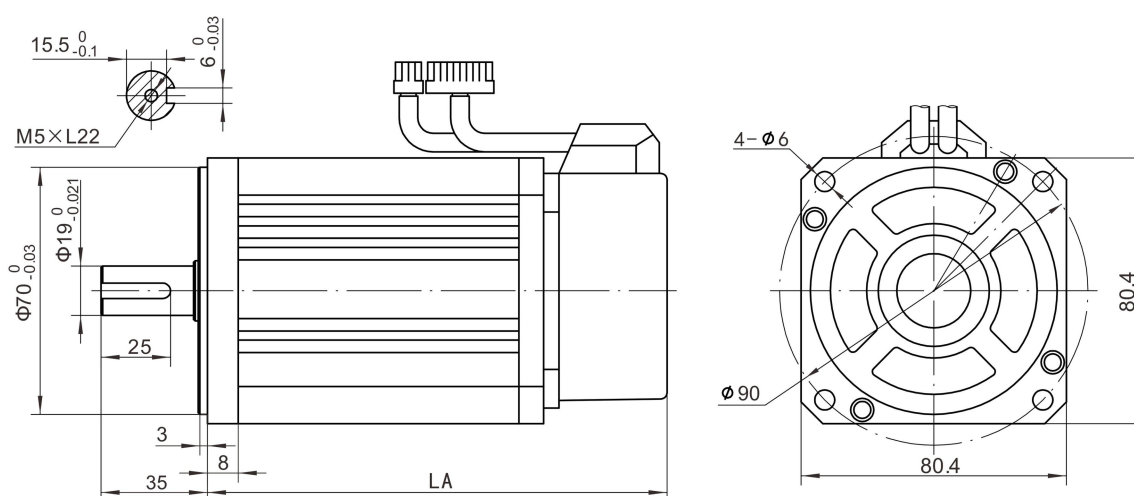


110 Series Motor Specification

Motor model	WE110M-12030S★△	WE110M-15030S★△	WE110M-18030S★△
Rated power (kW)	1.2	1.5	1.8
Rated torque (N·m)	4	5	6
Rated speed (r/min)	3000	3000	3000
Brake	Optional	Optional	Optional
LA without Brake (mm)	189	204	219
LA with Brake (mm)	254	269	284

Remark:

★ : A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

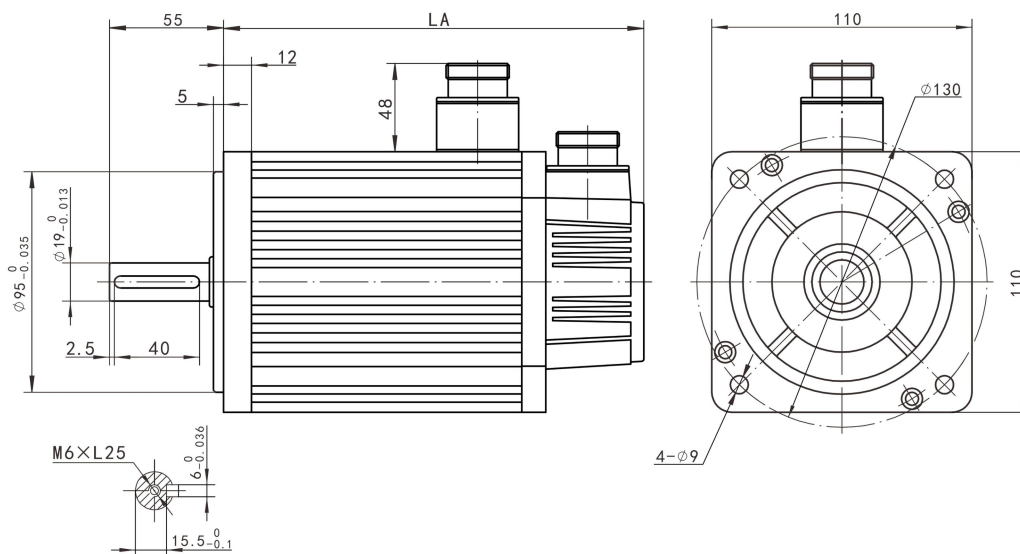

130 Series Motor Specification

Motor model	WE130M-10025S★△	WE130M-13025S★△	WE130M-15025S★△	WE130M-20025S★△
Rated power (kW)	1.0	1.3	1.5	2.0
Rated torque (N·m)	4	5	5	7.7
Rated speed (r/min)	2500	2500	2500	2500
Brake	Optional	Optional	Optional	Optional
LA without Brake (mm)	166	171	171	192
LA with Brake (mm)	226	231	231	252


Motor model	WE130M-15015S★△	WE130M-26025S★△	WE130M-23015S★△	WE130M-38025S★△
Rated power (kW)	1.5	2.6	2.3	3.8
Rated torque (N·m)	10	10	15	15
Rated speed (r/min)	1500	2500	1500	2500
Brake	Optional	Optional	Optional	Optional
LA without Brake (mm)	213	213	241	231
LA with Brake (mm)	279	279	304	294

Remark:

★ : A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

-L: Connector type

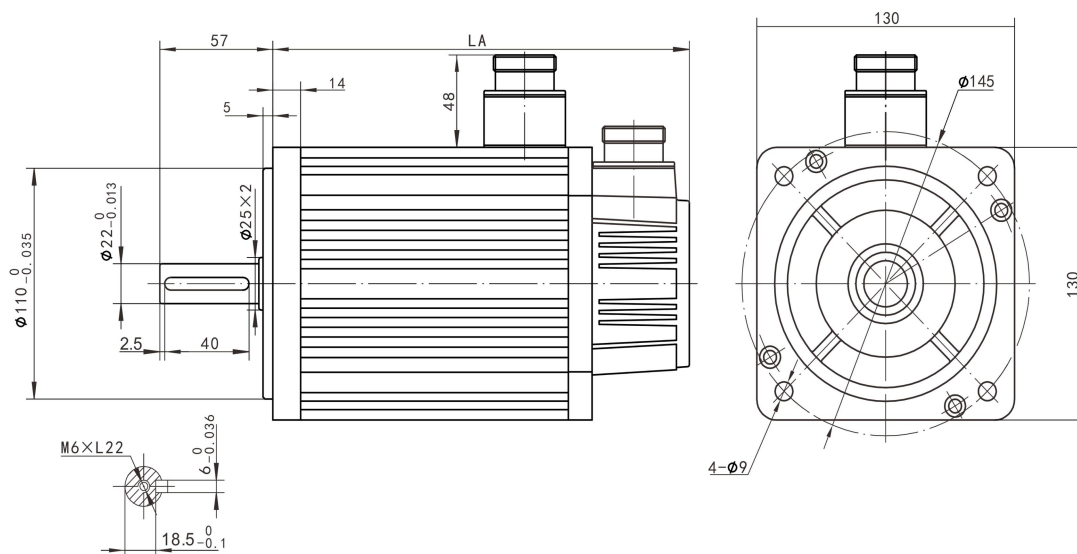

130 Series Motor Specification


Motor model	WE130M-20025T  	WE130M-26025T  	WE130M-38025T  
Rated power (kW)	2.0	2.6	3.8
Rated torque (N·m)	7.7	10	15
Rated speed (r/min)	2500	2500	2500
Brake	Optional	Optional	Optional
LA without Brake (mm)	192	213	231
LA with Brake (mm)	252	279	294

Remark:

★: A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

-L: Connect

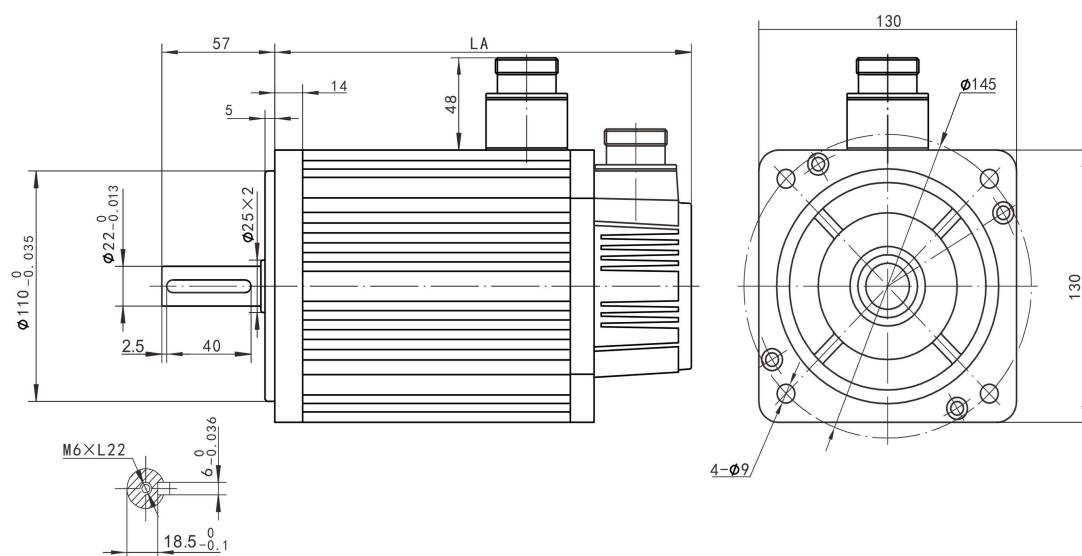

180 Series Motor Specification


Motor model	WE180M-30015T★△	WE130M-43015T★△	WE130M-55015T★△
Rated power (kW)	3.0	4.3	5.5
Rated torque (N·m)	19	27	35
Rated speed (r/min)	1500	1500	1500
Brake	Optional	Optional	Optional
LA without Brake (mm)	226	362	292
LA with Brake (mm)	298	334	364

Remark:

★ : A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

-L: Connect

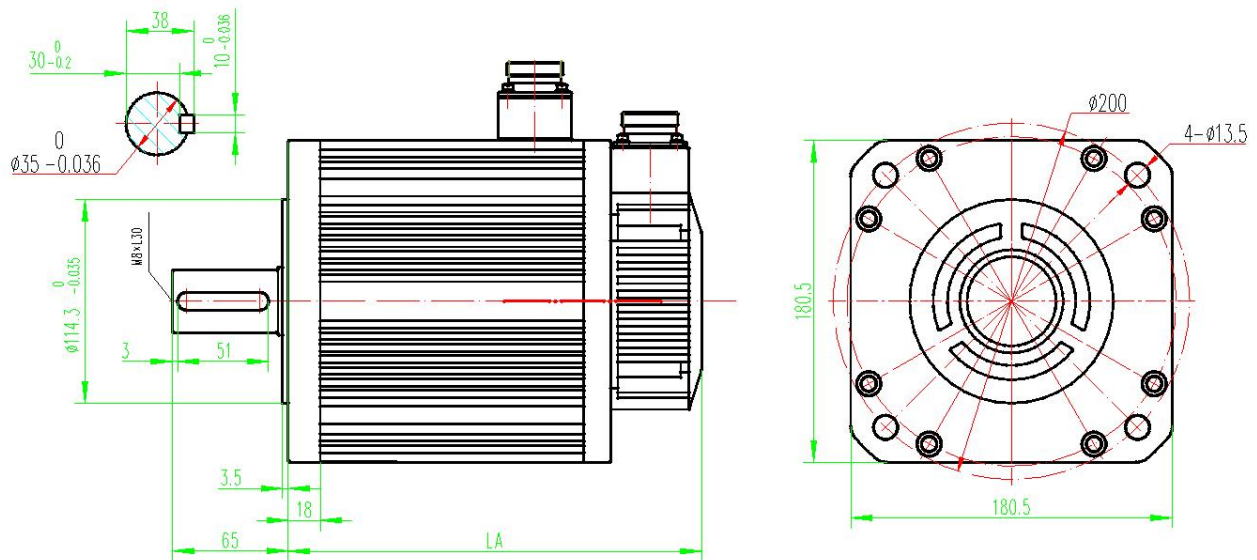

VD2F 17 bit Absolute Single Magnetic Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
40	WD40M-01030S-A1F	VD2F-003SA1P	0.318	3000	220V
60	WD60M-02030S-A1F	VD2F-010SA1P	0.64	3000	220V
60	WD60M-02030S-A1F-L	VD2F-010SA1P	0.64	3000	220V
60	WD60M-04030S-A1F	VD2F-010SA1P	1.27	3000	220V
60	WD60M-04030S-A1F-L	VD2F-010SA1P	1.27	3000	220V
80	WD80M-07530S-A1F	VD2F-014SA1P	2.39	3000	220V
80	WD80M-07530S-A1F-L	VD2F-014SA1P	2.39	3000	220V
80	WD80M-10030S-A1F	VD2F-014SA1P	3.18	3000	220V
80	WD80M-10030S-A1G	VD2F-014SA1P	3.18	3000	220V
80	WE80M-07530S-A1F	VD2F-014SA1P	2.39	3000	220V
80	WE80M-11030S-A1F	VD2F-014SA1P	3.5	3000	220V
80	WE80M-10025S-A1F	VD2F-014SA1P	4	2500	220V
80	WE80M-12030S-A1F	VD2F-014SA1P	4	3000	220V
110	WE110M-12030S-A1F	VD2F-014SA1P	4	3000	220V
110	WE110M-15030S-A1F	VD2F-014SA1P	5	3000	220V
130	WE130M-10025S-A1F	VD2F-014SA1P	4	2500	220V
130	WE130M-13025S-A1F	VD2F-014SA1P	5	2500	220V
130	WE130M-15025S-A1F	VD2F-014SA1P	6	2500	220V




VD2F 17 bit Absolute Multi Magnetic Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
40	WD40M-01030S-C1F	VD2F-003SA1P	0.318	3000	220V
60	WD60M-02030S-C1F-L	VD2F-010SA1P	0.64	3000	220V
60	WD60M-04030S-C1F	VD2F-010SA1P	1.27	3000	220V
60	WD60M-04030S-C1F-L	VD2F-010SA1P	1.27	3000	220V
80	WD80M-07530S-C1F	VD2F-014SA1P	2.39	3000	220V
80	WD80M-07530S-C1F-L	VD2F-014SA1P	2.39	3000	220V
80	WD80M-10030S-C1F	VD2F-014SA1P	3.18	3000	220V
80	WD80M-10030S-C1G	VD2F-014SA1P	3.18	3000	220V
80	WE80M-11030S-C1F	VD2F-014SA1P	3.5	3000	220V
80	WE80M-12030S-C1F	VD2F-014SA1P	4	3000	220V
110	WE110M-12030S-C1F	VD2F-014SA1P	4	3000	220V
110	WE110M-15030S-C1F	VD2F-014SA1P	5	3000	220V
130	WE130M-10025S-C1F	VD2F-014SA1P	4	2500	220V
130	WE130M-13025S-C1F	VD2F-014SA1P	5	2500	220V
130	WE130M-15025S-C1F	VD2F-014SA1P	6	2500	220V

VD2F 23 bit Absolute Multi Optical Encoder

Flange Size	Motor Model	Drive Model	Rated Torque (N.m)	Rated Speed (rpm)	Voltage
60	WD60M-02030S-D2F-L	VD2F-010SA1P	0.64	3000	220V
60	WD60M-04030S-D2F	VD2F-010SA1P	1.27	3000	220V
60	WD60M-04030S-D2F-L	VD2F-010SA1P	1.27	3000	220V
80	WD80M-07530S-D2F	VD2F-014SA1P	2.39	3000	220V
80	WD80M-07530S-D2F-L	VD2F-014SA1P	2.39	3000	220V
80	WD80M-10030S-D2F	VD2F-014SA1P	3.18	3000	220V
80	WD80M-10030S-D2G	VD2F-014SA1P	3.18	3000	220V
80	WE80M-11030S-D2F	VD2F-014SA1P	3.5	3000	220V
80	WE80M-12030S-D2F	VD2F-014SA1P	4	3000	220V
110	WE110M-12030S-D2F	VD2F-014SA1P	4	3000	220V
110	WE110M-15030S-D2F	VD2F-014SA1P	5	3000	220V
130	WE130M-10025S-D2F	VD2F-014SA1P	4	2500	220V
130	WE130M-13025S-D2F	VD2F-014SA1P	5	2500	220V
130	WE130M-15025S-D2F	VD2F-014SA1P	6	2500	220V

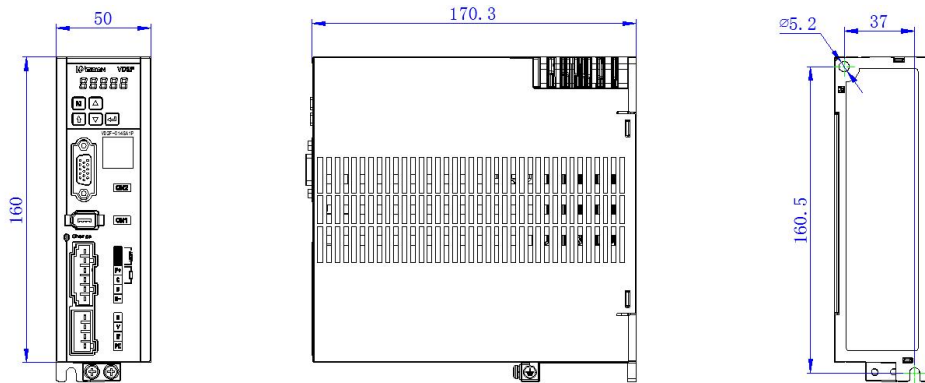

SPECIFICATION

Item			VD2F Series
Basic Specifications	Voltage		220V
	Control Method		IGBT PWM controlled sine wave current drive
	Encoder		17 bit, 23 bit absolute encoder
	Input Signal		4*DI
	Output Signal		4*DO
	Analog Signal Input		—
	Pulse Signal Input		Open collector or differential input
	Pulse Feedback Output		Z signal open collector output
	Internal Instructions		Support 8 internal speed commands and internal multi-segment position commands
	Communication / Debug		Support to communicate with modbus device or debug with SCTools
	Braking Resistor		750W built-in baking resistor; 400W without built-in baking resistor; both support external braking resistor
Function Setting	General Function	Self-tuning	SCTools supports self-turning function, and identifies load inertia identification and rigidity level, and other parameters.
		Waveform Monitoring	View position, speed, torque and other curves on PC in real time
		Waveform Storage	The original waveform data could be stored for up to 10s
		Parameter Import / Export	Support batch parameter import and export; support PLC configure servo parameters automatically (supported by some models)
		Vibration Suppression	Suppress mechanical vibration by setting vibration suppression parameters
		Protective Function	Overvoltage, undervoltage, overcurrent, overspeed, overload, overheating, encoder failure, excessive position deviation, torque limit, speed limit, etc
		Brake	Support
		Universal Control DI	Servo enable (SON), fault and warning clear (A-CLR), forward drive prohibition (POT), reverse drive prohibition (NOT), command reverse (C-SIGN), emergency stop (E-STOP), Gain switching (GAIN-SEL), Multi-speed command selection (INSPD1、INSPD2、INSPD3) ; Internal multi-position command selection and enable (POS1, POS2, POS3, POS4, POSEN)
		Universal Control DO	Servo ready (RDY), fault signal (ALM), warning signal (WARN), rotation detection (TGON), zero speed signal (ZSP), torque limit (T-LIMIT), speed limit (V-LIMIT), servo on state output (SRV-ST), servo brake output (BRK-OFF) ; Z signal input
	Pulse Input	Pulse Frequency	Maximum 500khz
		Pulse Type	Pulse + Direction, Orthogonal coding
		Pulse Filtering	First-order low-pass filter or smooth filter
		Pulse Output	—
	Speed Mode	Command Input	Only internal speed command is supported (Maximum 8)
		Zero Clamp	Motor speed could be clamped to zero via the setting of zero clamp function
		Torque Limit	Support to set the torque limit
	Torque Mode	Command Input	Only internal torque command is supported
		Torque Reaching	Torque reaching threshold and DO can be set flexibly
		Speed Limit	The speed limit can be set flexibly

40 Series Motor Specification


Motor model	WD40M-01030S-A1F	WD40M-01030S-C1F
Rated power (kW)	0.1	
Rated torque (N·m)	0.318	
Rated speed (r/min)	3000	
Brake	Optional	
LA without Brake (mm)	74.8	
LA with Brake (mm)	108	

Remark:

A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

F-sealed; G-sealed & Brake

-L: Connector type

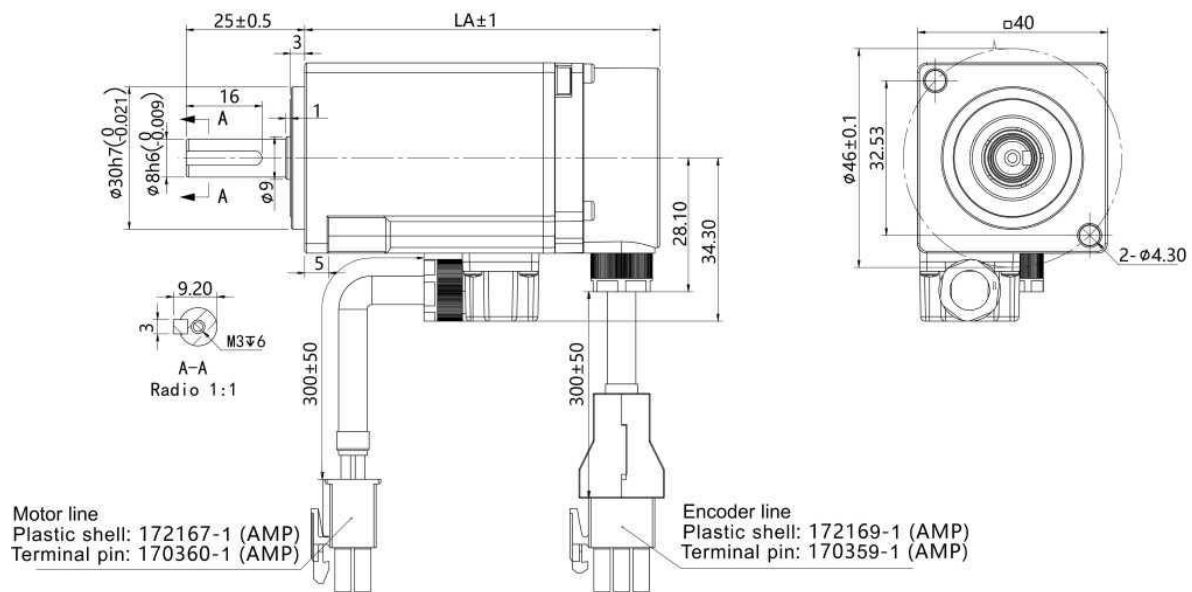

60 Series Motor Specification


Motor model	WD60M-02030S  	WD60M-04030S  
Rated power (kW)	0.2	0.4
Rated torque (N·m)	0.64	1.27
Rated speed (r/min)	3000	3000
Brake	Optional	Optional
LA without Brake (mm)	75	92
LA with Brake (mm)	104.5	121.5

Remark:

★: A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

-L: Connector type

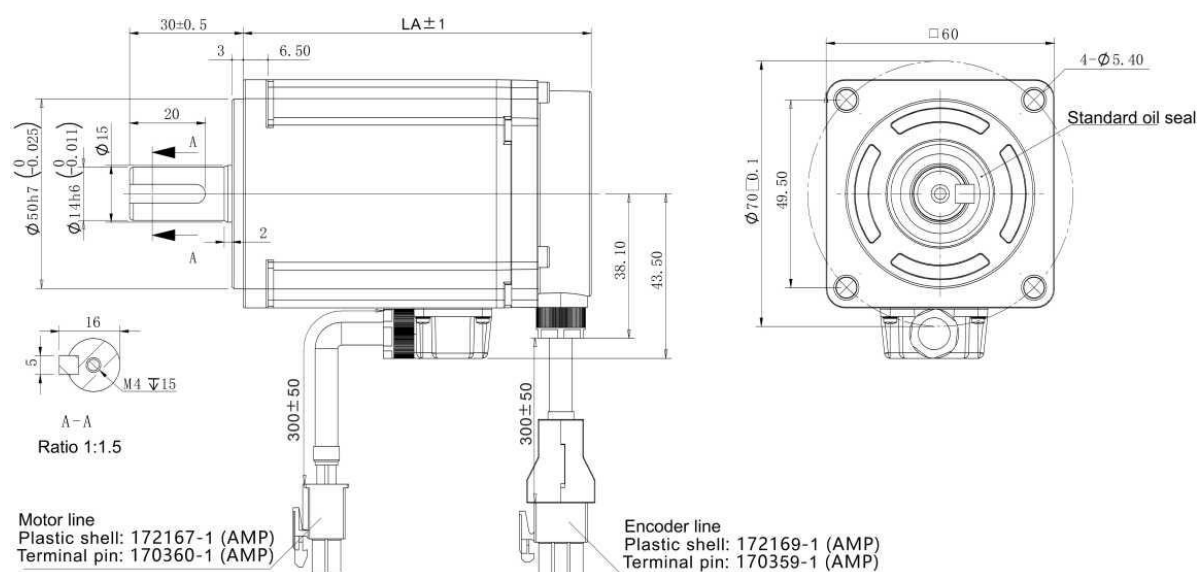

80 Series Motor Specification


Motor model	WD80M-07530S★△	WD80M-10030S★△
Rated power (kW)	0.75	1
Rated torque (N·m)	2.39	3.18
Rated speed (r/min)	3000	3000
Brake	Optional	Optional
LA without Brake (mm)	98.5	98.5
LA with Brake (mm)	132.5	132.5

Remark:

★ : A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

-L: Connector type

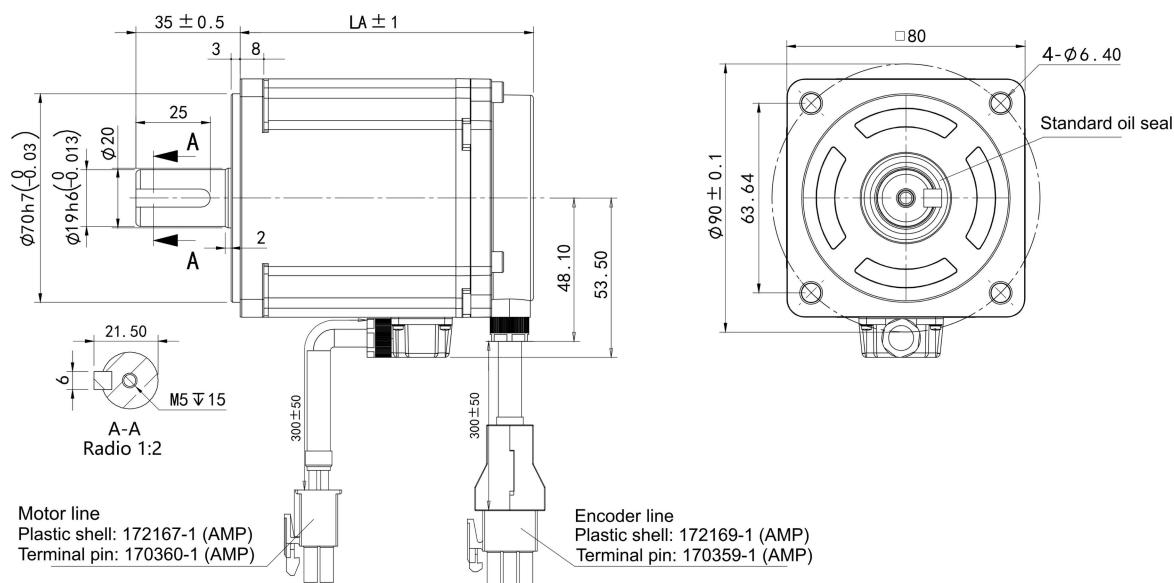

80 Series Motor Specification

Motor model	WD80M-10025S★△	WD80M-11030S★△	WD80M-12030S★△
Rated power (kW)	1	1.1	1.2
Rated torque (N·m)	4	3.5	4
Rated speed (r/min)	2500	3000	3000
Brake	Optional	Optional	Optional
LA without Brake (mm)	191	179	191
LA with Brake (mm)	233	221	233

Remark:

★ : A1-17 bit single Magnetic encoder; C1-17 bit Multi Magnetic encode; D2- 23bit Multi Optical encoder

△ : F-sealed; G-sealed & Brake

-L: Conn

